

Features

- To replace 60 watt E26/27 standard household incandescent
- Low cost operation: 85% electricity saving compared to incandescent and greater than 40% savings compared to CFL
- Maintenance free - long life operation
- Unique thermal system. It's effective to keep LED junction temperature below 90°C, with only 60°C of housing temperature
- High energy efficiency: can reach 78lm/w with CREE light engine
- Excellent color rendering. CRI - 80 with warm white and neutral white
- Environmentally friendly-No mercury. No lead & RoHS compliant
- UV and IR free



Product Offering

Item	Dimmable	Wattage	Input Voltage	Color Temperature
A19	No	8W	80-260V	2700K-5500K
A19D	Yes	7W	80-260V	2700K-5500K

- Beam Angle: 120° full beam angle
- CCT range selection: 2700-2800K; 4500K-4750K; 5000-5500K
- Available in E26, E27, or B22 base

Description

The new A19 LED ball bulb uses 7 Watts power to illuminate as much light as a 60 Watt incandescent light bulb. These energy efficient lamps save you money through reduces maintenance and electricity costs while having a positive effects on the environment. You can use it in most places where you currently use a standard incandescent bulb.

Application Information

Applications

Home lighting
Office lighting
Retail lighting
Hotel & restaurant lighting
High ceiling lighting
Industrial and commercial lighting

Notes

- Operating temperature range between -20°C and +40°C (-4°F and +104°F)
- For used in dry indoor only
- Non Dimmable is not for use with dimmers or in luminaries controlled by a dimmer
- Not for use where exposed to weather
- Not for use in totally enclosed recessed fixtures
- Not intended for use with emergency exit fixtures or emergency lights

Parkwell Lighting International Limited

Unit L, 7/F, Hong Kong (Chai Wan) Industrial Building, Chai Wan, Hong Kong

Tel: 36982388 Fax: 36982399 Email: info@parkwell-lighting.com




Performance Summary

Item	Nominal			Lumen	Beam	Housing		
	Wattage	Input Voltage	CCT	Output	Angle	CRI	PF	Temperature
A19	7W	80-260V	2700-2800K	485lm	120°	80	0.93	60°C
A19	7W	80-260V	5000-5500K	550lm	120°	75	0.93	60°C

Note: All specifications @ 25°C ambient condition

Dimension

Lamp Type	A (mm)	B (mm)	Weight (g)
A19 / A19D	110	60	175

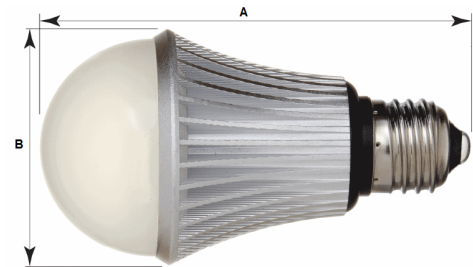

Packaging Information

Lamp Type	Dimension (cm)	Gross Weight (kg)	Net Weight (kg)	Qty/Carton
A19 / A19D	46.5x23.4x24.2	7.4	5.4	36

Ordering Guide

E210		A	O1	O7	W2	40	B
Lamp Type	Dim /Non Dim	Voltage	Bass	Wattage	CCT	Beam Angle	Housing finish
A19	No	A: 80-260V	01: E26	8W	W2: 2700-2800K;	120: 120°	S: silver
A19D	Yes		02: E27 03: B22	7W	W10: 4500-4750K; C1: 5000-5500K;		

Parkwell Lighting International Limited

Unit L, 7/F, Hong Kong (Chai Wan) Industrial Building, Chai Wan, Hong Kong
Tel: 36982388 Fax: 36982399 Email: info@parkwell-lighting.com

