

FlexiLux-30 LED Strip

Luminux is proud to introduce you the FlexiLux series of flexible LED strips that will exceed the requirements of the most demanding architecture and interior design applications.

Luminux also offers a full line of accessories to include controllers, amplifiers, power supplies, aluminium profiles, cable splitters and specialty connectors, making Luminux your one-stop destination for all your LED strip needs.



Applications


- Decorative lighting and backlighting applications
- Large company logos, advertising and signage boards
- Outdoor and indoor decorative and safety lighting
- Outdoor pathway, theatre and auditorium walkway, emergency hallway lighting
- Furniture and under the cabinet, display case, door edge and stairway accent lighting

Features

- Available for Monocolor from 2400K (Super Warm) to 6000K (Daylight)
- Precision Color Temperature Control to ensure uniformity of lighting effect
- Dimmable by external control gear: 0/1-10V, DALI, DMX, EcoSystem and LED Dimmer
- LED distribution available in 30 LEDs per meter, LED pitch 33mm
- IP65, IP67 or IP 68 come with silicon sleeves for highest IP rating
- Can be cut every 3 LEDs (12V), or 5 LEDs (24V)
- Optional specialty connectors for waterproof and easy connection
- Supports 12 or 24 VDC power supply installations
- All models come with 3M adhesive backing for quick and easy installation



Colour Temperature Selection Reference

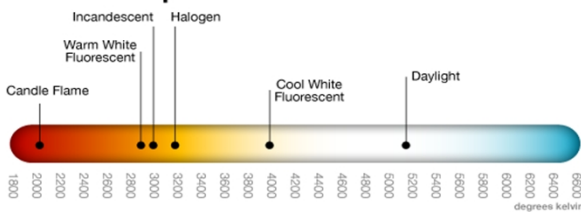

Order Code Matrix:

FlexiLux-30			50IP	V
	↑		↑	↑
Color	IP	Input		
Option:	Rating	Voltage		
2400K=24	Option:	Option:		
2700K=27	IP20=20	12VDC=12		
3000K=30	IP65=65	24VDC=24		
4000K=40	IP67=67			
5000K=50	IP68=68			
6000K=60				

FlexiLux-30 LED Strip Ordering Specifications

Ordering Code	LED Type	Color Temperature	No. of LED / Meter	IP Rating Option	Input Voltage		Power / Meter	Lumen / Meter
					Option	Dimmable		
FlexiLux-302450IPxxVxx	SMD	2400K	30	IP20/IP65/IP67/IP68	12/24VDC	Yes	7.2W	500
FlexiLux-302750IPxxVxx	SMD	2700K	30	IP20/IP65/IP67/IP68	12/24VDC	Yes	7.2W	550
FlexiLux-303050IPxxVxx	SMD	3000K	30	IP20/IP65/IP67/IP68	12/24VDC	Yes	7.2W	550
FlexiLux-304050IPxxVxx	SMD	4000K	30	IP20/IP65/IP67/IP68	12/24VDC	Yes	7.2W	600
FlexiLux-305050IPxxVxx	SMD	5000K	30	IP20/IP65/IP67/IP68	12/24VDC	Yes	7.2W	660
FlexiLux-306050IPxxVxx	SMD	6000K	30	IP20/IP65/IP67/IP68	12/24VDC	Yes	7.2W	660

Remark:

5 meter per reel

Connector and LED Driver are not included


IP20 Size: 5000 X 10 X 2mm

IP65 Size: 5000 X 12 X 4mm

IP67 Size: 5000 X 12 X 4mm

IP68 Size: 5000 X 12 X 4mm

FlexiLux-30 Average Beam Angle

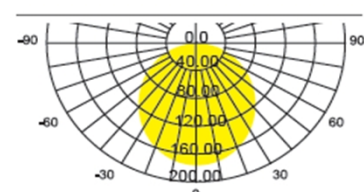

FlexiLux-30 LED Strip




Specifications:

Input Power Option	12/24VDC
Power Consumption per Meter	7.2W
Power Consumption per Roll	36W
LED per Meter	30
LED per Roll	150
LED Rows	1
Channels	1
IP Rating Option	IP20/IP65/IP67/IP68
Material / Characteristics	Flexible
LED Type	SMD
LED Color Option	2400K/2700K/3000K/4000K/5000K/6000K
Lumen /Meter	500-660
LED Beam Angle	120°
CRI	80+ (optional: 90+ or 95+)
Housing Color	White
Mounting	Surface Mount
Connection Strip	2 Cables (V+, V-)
Energy Efficiency Rated	A
Working Temperature	-5°C - +40°C
Cutting per LED	3 / 5 LEDs
Dimmable	0/1-10V, DALI, DMX, EcoSystem, LED Dimmer Control
Non-Waterproof Dimensions	5000 X 10 X 2mm
Waterproof Dimensions	5000 X 12 X 4mm



Cutting and Installation

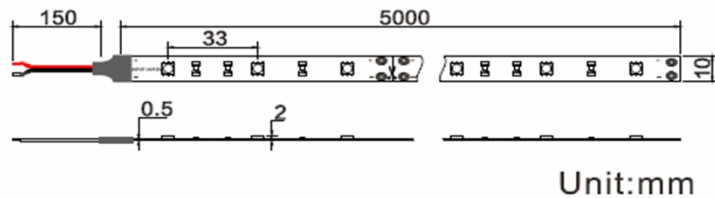

Waterproof LED Strip Installation Diagram



Non-Waterproof LED Strip Installation Diagram

3M Adhesive in the backside



Attached and Fixed Directly

